


Firmware herunterladen (<https://www.generex.de/partners/oem/4/ups/cs121/update>) und entpacken. Anschließend die „FlashWizard.exe“ aufrufen.

IP Adresse, Username und Passwort wie folgt angeben und „Passiv mode“ auswählen.

The screenshot shows the 'Flash Wizard' application window with the 'Find device' tab selected. The 'Check connection' section has the IP address '192.168.20.120' and Port '4000' entered. A log window shows the connection status: '192.168.20.120 replied' (repeated four times) and 'Checking port 4000 ... OK'. The 'FTP' section has 'admin' as the username, a masked password, and Port '21'. The 'Passive mode' radio button is selected. At the bottom, the 'Weiter >' button is highlighted.

Die ausgelesenen Daten mit „Weiter“ bestätigen.


The screenshot shows the 'Flash Wizard' application window with the 'Information about found device' tab selected. The 'Device information' section displays: MAC address: '00-03-05-0F-7A-E5', ROM version: '2.3.5(pduc) - may 11, 2010', and Firmware version: '4.42'. The 'Device configuration' section contains a checkbox for 'Configure the device and exit the update tool', which is currently unchecked. At the bottom, the 'Weiter >' button is highlighted.

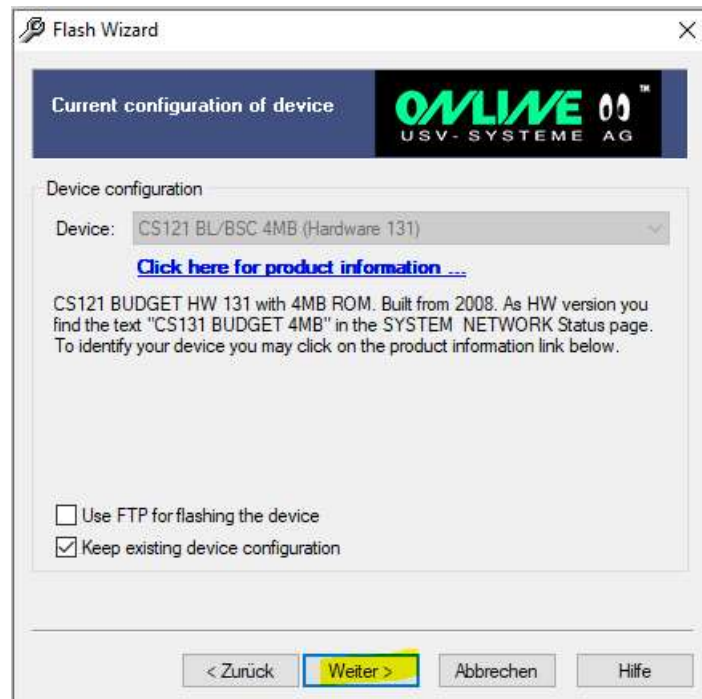


Meist kann die vorhandene Konfiguration nicht übernommen werden.



Sicherung der „upsman.cfg“.

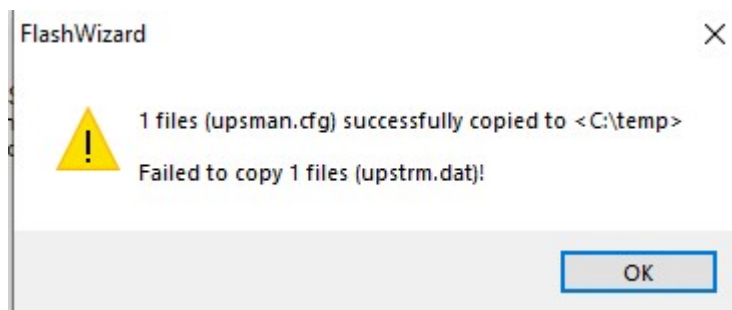

Das update auf die neue Version mit „Weiter“ bestätigen.

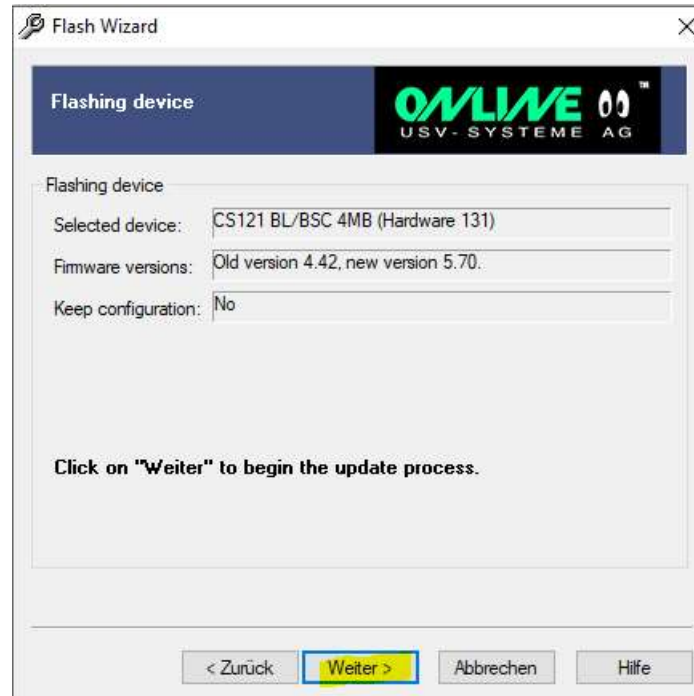


Das update startet.



Die Firmware wird in den Flashspeicher geschrieben.



Anschließend wird die Netzwerkmanagementkarte neu „gebootet“.

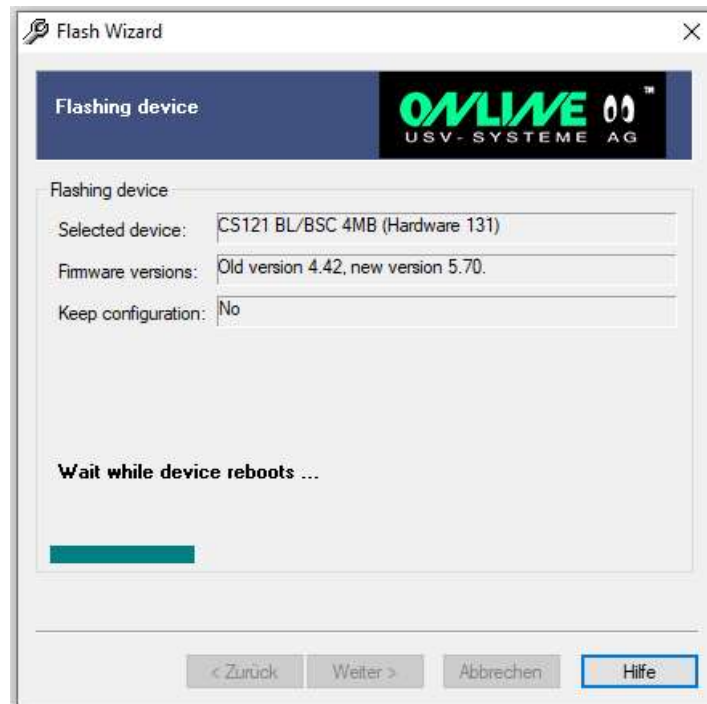

Warten bis der Vorgang abgeschlossen ist.



Die gesicherte Konfiguration wieder einspielen oder die Netzwerkmanagementkarte neu konfigurieren.